




1M LIPOD PROFILE ANODISED
B5554ANODA_1
SILVER ANODISED
Remote CONTROL GEAR
IP20
CURRENT: YmA
VOLTAGE: 12V, 24V

Ability to create a line of light Easy mounting using various techniques Can be combined in straight and broken linear runs Can be sealed by Klus in fixed lengths to achieve an IP65 waterproof rating

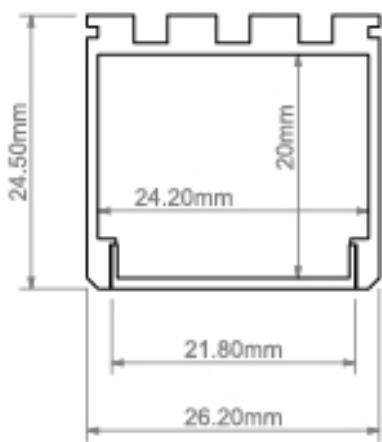

<b>Accessories</b>	
00644	FASTENER DP
42520	BLOCKADE ZM
42716	CONNECTOR ZM 90
42719	CONNECTOR ZMPION 135
42718	CONNECTOR ZMPION 90
C0399NA_1	1M TEKNIK-ZM PROFILE RAW
42740	LIPOD COUPLER L90 LIGER 22
42741	LIPOD COUPLER L90PZ LIGER 22
42742	LIPOD COUPLER L90PW LIGER 22
42743	LIPOD COUPLER L135PZ LIGER 22
42744	LIPOD COUPLER L135PW LIGER 22
42745	LIPOD COUPLER L135 LIGER 22
42746	LIPOD COUPLER T135R LIGER 22
42747	LIPOD COUPLER T135L LIGER 22
42748	LIPOD COUPLER T90 LIGER 22
42749	LIPOD COUPLER X90 LIGER 22
42750	LIPOD COUPLER X135 LIGER 22
42740	LIPOD COUPLER L90 LIGER 22
<b>Components</b>	
17044_1	1M LIGER-22 BLACK COVER
17007_1	1M G-K FROSTED COVER