




|                             |
|-----------------------------|
| 2M MICRO-H PROFILE ANODISED |
| C0599ANODA_2                |
| SILVER ANODISED             |
| Remote CONTROL GEAR         |
| IP20                        |
| CURRENT: YmA                |
| VOLTAGE: 12V, 24V           |

Clean design of the lighting fixture Easy snap-in mounting and dismounting Small size Can be sealed by Klus in fixed lengths to achieve an IP67 waterproof rating

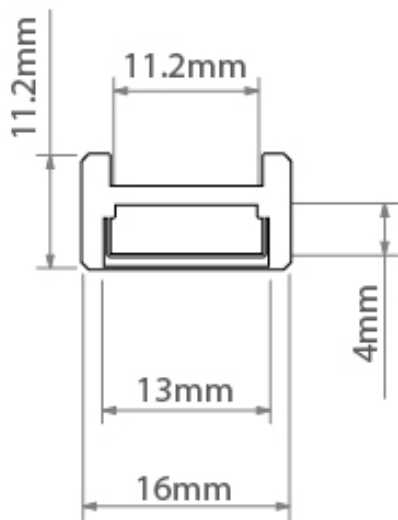

| Accessories |   |
|-------------|---|
| 802         | CABLE GROMMET 8.8X1.2 HR-ALU, KIDES-DUO |