



2M OPK-4 PROFILE ANODISED

C0370ANODA_2


SILVER ANODISED

Remote CONTROL GEAR

IP20

CURRENT: YmA

VOLTAGE: 12V, 24V

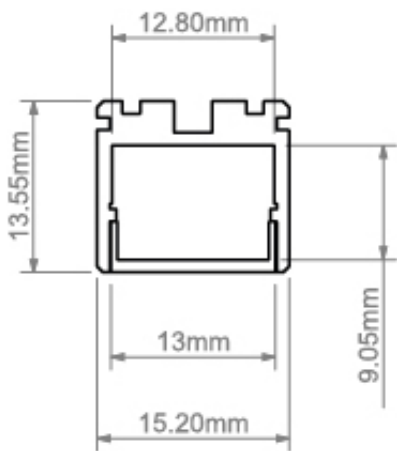

Easy LED service (assembly and disassembly OPK-4 extrusion „ on click“) Line of light in the built-in lighting fixture without visible aluminum elements Can build fixtures going seamlessly from recessed to suspended Smoothly changing lighting height OPK-4 profile can be bent Lighting fixtures can be combined to form lighting strings (ZM connectors) The standard TPK-4 profile comes with a "foam technical cover" that facilitates "clean" mounting of the fixture in the drywall Can be sealed by Klus in fixed lengths to achieve an IP67 waterproof rating

Accessories	
00293V1	SURFACE SPRINGS GP
42520	BLOCKADE ZM
802	CABLE GROMMET 8.8X1.2 HR-ALU, KIDES-DUO
42716	CONNECTOR ZM 90
42719	CONNECTOR ZMPION 135
42718	CONNECTOR ZMPION 90