


2M PDS-ZM PROFILE ANODISED
B7696ANODA_2
SILVER ANODISED
Remote CONTROL GEAR
IP20
CURRENT: YmA
VOLTAGE: 12V, 24V

Minimum dimensions to obtain a line of light Equipped with a small lock that allows the use of system fasteners and extrusion connectors Can be sealed by Klus in fixed lengths to achieve an IP67 waterproof rating

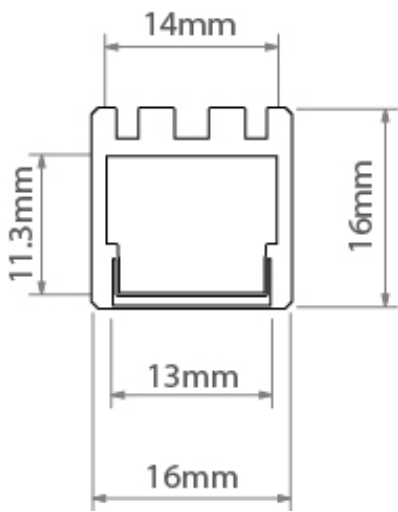

Accessories	
00293V1	SURFACE SPRINGS GP
42520	BLOCKADE ZM
42716	CONNECTOR ZM 90
42719	CONNECTOR ZMPION 135
42718	CONNECTOR ZMPION 90