



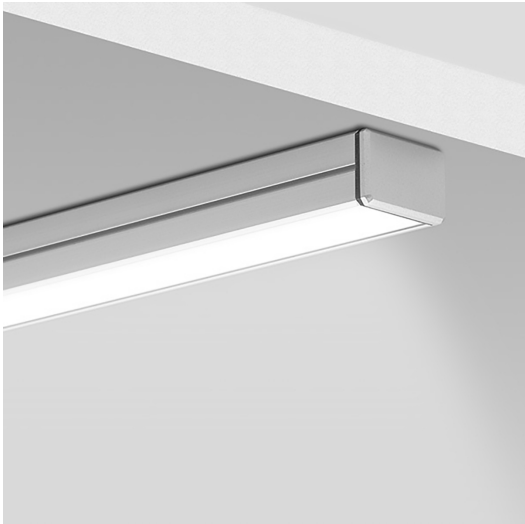

|                           |
|---------------------------|
| 2M SILER PROFILE ANODISED |
| B9325ANODA_2              |
| SILVER ANODISED           |
| Remote CONTROL GEAR       |
| IP20                      |
| CURRENT: YmA              |
| VOLTAGE: 12V, 24V         |

Will accommodate LEDs up to 14.6 mm wide Possible to obtain a watertight lighting fixture Can be sealed by Klus in fixed lengths to achieve an IP67 waterproof rating

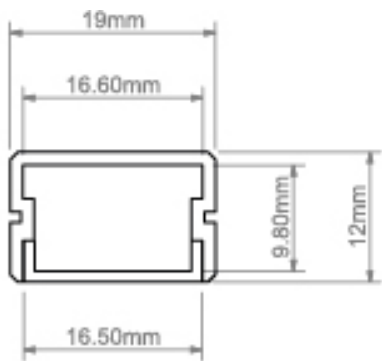

| Accessories |                                         |
|-------------|-----------------------------------------|
| 00800V1     | SURFACE SPRING PDS                      |
| 42212       | HEAD 45-ZZ                              |
| 00644       | FASTENER DP                             |
| 00654       | FASTENER DP-45-MOC-ZZ                   |
| 802         | CABLE GROMMET 8.8X1.2 HR-ALU, KIDES-DUO |