




2M STOS-ALU PROFILE ANODISED
B4369ANODA_2
SILVER ANODISED
Remote CONTROL GEAR
IP20
CURRENT: YmA
VOLTAGE: 12V, 24V

Simple design and functionality Can be sealed by Klus in fixed lengths to achieve an IP65 or IP67 waterproof rating

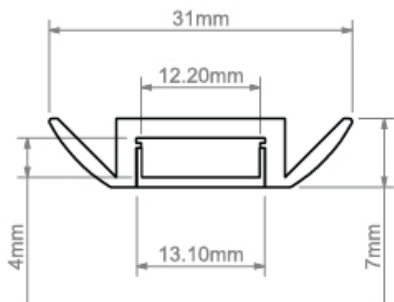

Accessories	
00800V1	SURFACE SPRING PDS
802	CABLE GROMMET 8.8X1.2 HR-ALU, KIDES-DUO
Components	
00158_2	2M HS-12 TRANSPARENT COVER
00157_2	2M HS-12 FROSTED COVER